SX

Dimensions

NOTE: All dimensions are approximate; measure your spa before making critical design or pathway decisions.

(Front view)

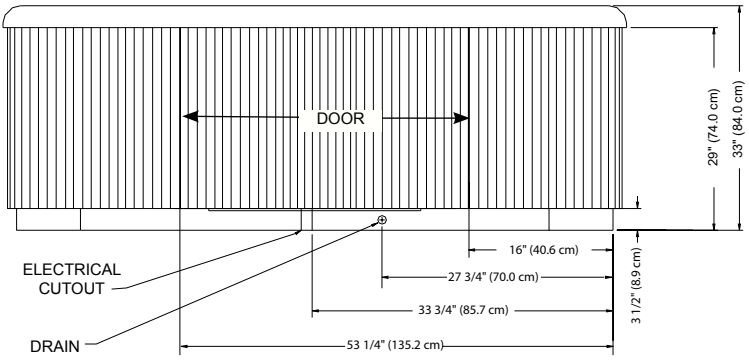

(Bottom view)

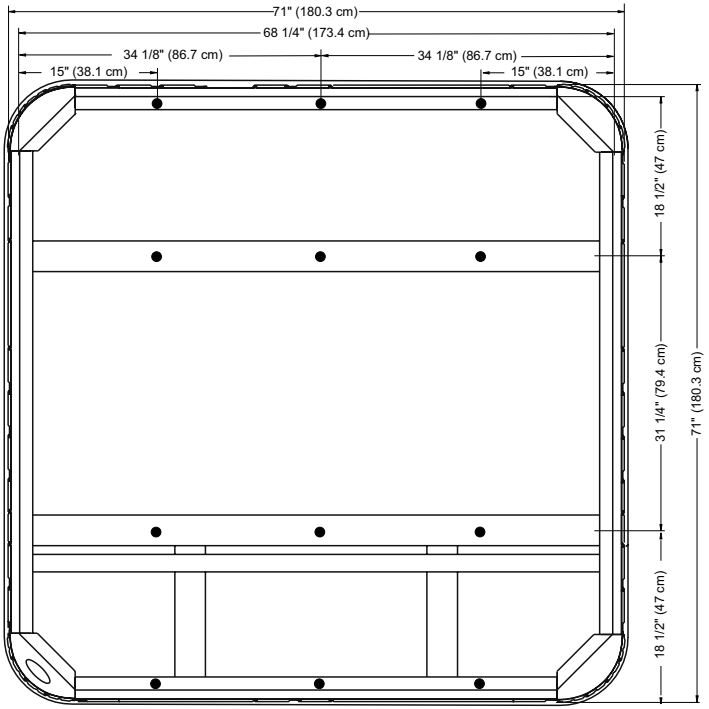

DOOR SIDE

NOTE: Watkins Manufacturing Corporation recommends that the SX be installed on a minimum 4" thick reinforced concrete pad or structurally sound deck able to support the "dead weight" found in the spa specification chart.

- **THE SX MAY BE SHIMMED BY PLACING SHIMS AT THE 12 LEVELING POINTS ILLUSTRATED.**