
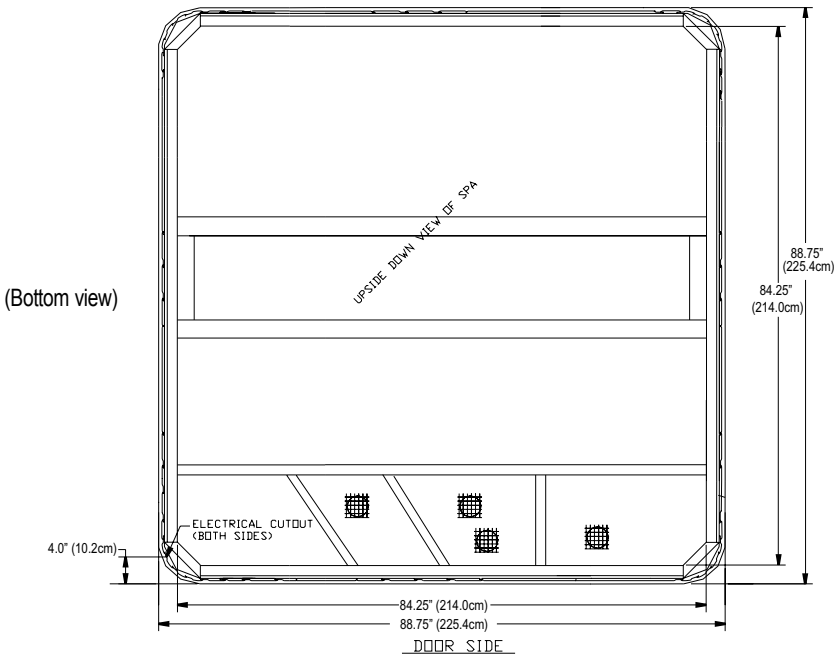


# TEMPO™

## Dimensions

**NOTE:** All dimensions are approximate; measure your spa before making critical design or pathway decisions.

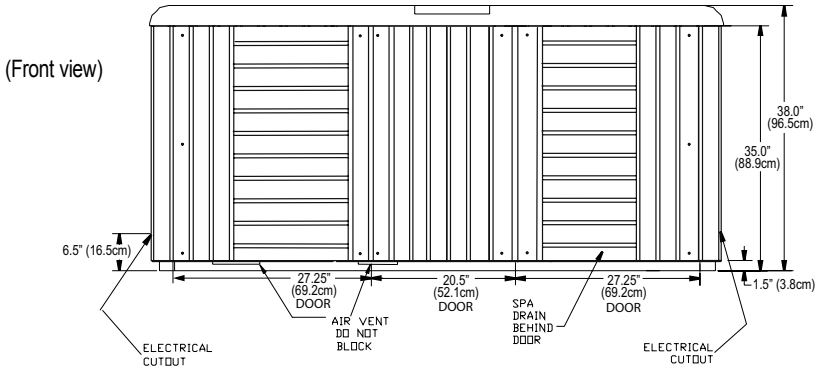

**NOTE:** Watkins Manufacturing Corporation recommends that the Tempo be installed on a minimum 4" thick reinforced concrete pad or structurally sound deck able to support the "dead weight" found in the spa specification chart.

**WARNING: THE TEMPO MUST NOT BE SHIMMED IN ANY MANNER.**