


# TX

## Dimensions

**NOTE:** All dimensions are approximate; measure your spa before making critical design or pathway decisions.

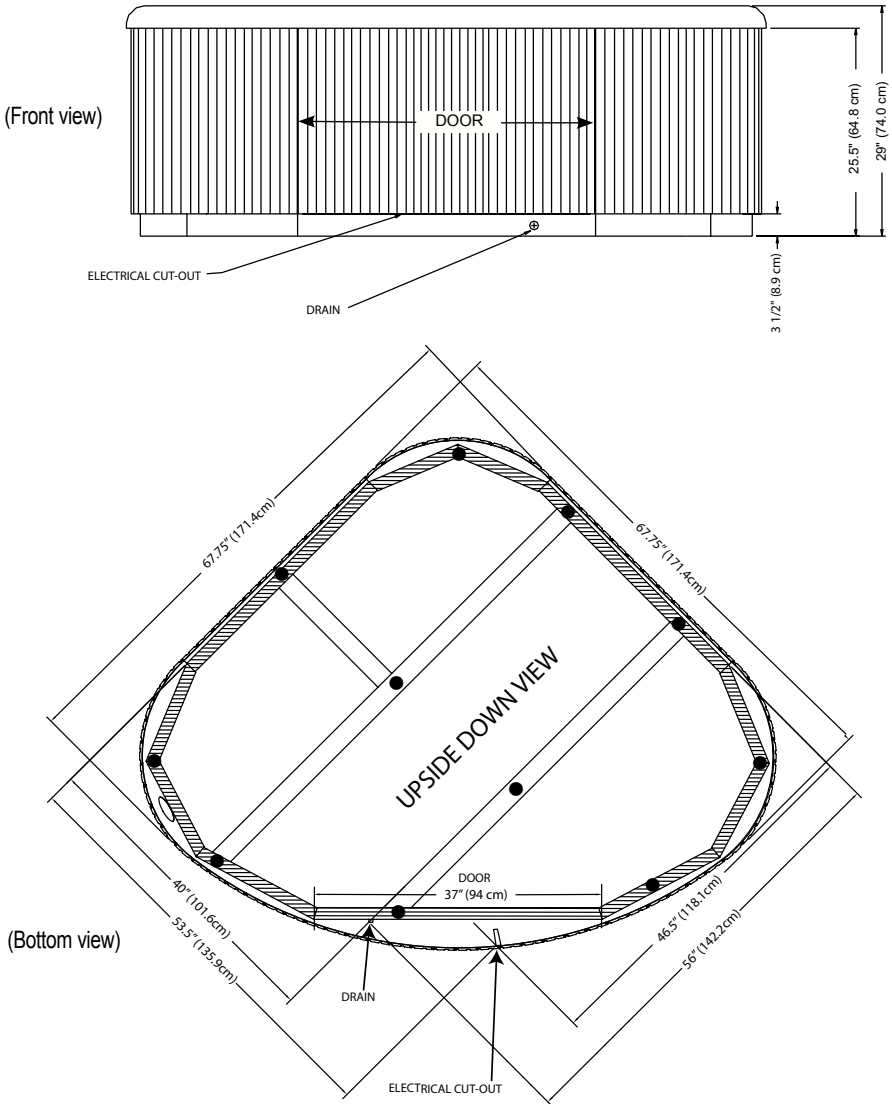

**NOTE:** Watkins Manufacturing Corporation recommends that the SX be installed on a minimum 4" thick reinforced concrete pad or structurally sound deck able to support the "dead weight" found in the spa specification chart.

- THE TX MAY BE SHIMMED BY PLACING SHIMS AT THE 11 LEVELING POINTS ILLUSTRATED.